

ISEO
AQUARIVA SUPER
RIVARAMA SUPER
RIVALE
SPORTRIVA 56'
63' VERTIGO
63' VIRTUS
68' EGO SUPER
75' VENERE SUPER
86' DOMINO
88' FLORIDA
92' DUCHESSA
122' MYTHOS

A close-up photograph of a car's body panel, showing a chrome badge that reads "63 VIRTUS". The badge is mounted on a dark, metallic surface with a brushed finish. The lighting creates highlights and shadows that emphasize the contours of the car's body and the metallic texture of the badge. The "63" is in a stylized, blocky font, while "VIRTUS" is in a more classic, serif font. The background shows the car's body lines and a chrome trim piece at the bottom.














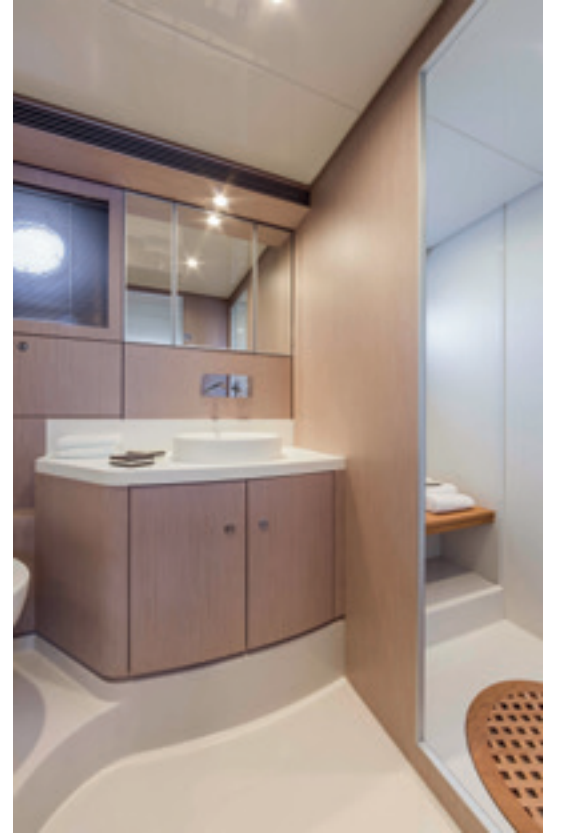







Motorizzazione	2 * MAN V12 - 1360		
	POTENZA 1360 mhp / 1000 kW a 2300 giri/min		
Velocità	Velocità massima	nodi 40,5	
	in nodi Velocità di crociera	nodi 35	
Autonomia	Velocità massima	m.n. 230	
	in miglia nautiche - dato indicativo Velocità di crociera	m.n. 255	
Dimensioni principali	Loa = Lunghezza fuori tutto ISO 8666.....	19,57 m. - 64 ft. 2 in.	
	Lh = Lunghezza di costruzione ISO 8666.....	19,03 m. - 62 ft. 5 in.	
	Lg = Lunghezza al galleggiamento (a pieno carico)	15,62 m. - 51 ft. 3 in.	
	Larghezza massima.....	4,80 m. - 15 ft. 9 in.	
	Immersione sotto le eliche (a pieno carico).....	1,60 m. - 5 ft. 3 in.	
	Dislocamento ad imbarcazione scarica e asciutta	27,70 t. - 61068 lbs.	
	Dislocamento a pieno carico.....	32,30 t. - 71209 lbs.	
	Numero massimo di persone imbarcabili.....	12	
	Categoria di navigazione CE 2003/44.....	A	
	Certificazione moduli.....	B + F + Aa (sound emission) RINA S.p.A.	
Dati caratteristici	Tipo di carena: a geometria variabile con deadrise 17° e pattini di sostentamento		
	H massima = Altezza massima dalla chiglia al roll-bar	4,72 m. - 15 ft. 6 in.	
	H trasporto = Altezza minima per il trasporto dalla chiglia.....	4,28 m. - 14 ft. 1 in.	
	P1 = Sporgenza prodiera del pulpito.....	0,52 m. - 1 ft. 8 in.	
	P2 = Sporgenza poppiera del portellone	0,00 m. - 0 ft. 0 in.	
	Capacità serbatoi carburante.....	3200 lt. - 845 US gals.	
	Capacità serbatoi acqua.....	660 lt. - 174 US gals.	
Specifiche prestazionali	I dati prestazionali sono stabiliti al seguente dislocamento:	29,42 t. - 64851 lbs.	
	e si riferiscono alla barca nella versione standard		
	a 1/3 carico liquidi, con carena pulita, temp. 25°C,		
	buone condizioni climatiche e 6 persone a bordo.		
	Sovraccaricando la barca di	1,5 t. - 3307 lbs.	
	Si ha una perdita di velocità massima pari a	1 nodo	

Motorization	2 * MAN V12 - 1360		
	POWER 1360 mhp / 1000 kW at 2300 rpm		
Speed	Maximum speed	knots 40,5	
	in knots Cruising speed.....	knots 35	
Range	Maximum speed	n.m. 230	
	in nautical miles - prediction data Cruising speed.....	n.m. 255	
Main sizes	Loa = Overall length (standard ISO 8666)	19,57 m. - 64 ft. 2 in.	
	Lh = Hull length (standard ISO 8666).....	19,03 m. - 62 ft. 5 in.	
	Lwl = Waterline length (boat fully laden)	15,62 m. - 51 ft. 3 in.	
	Maximum beam.....	4,80 m. - 15 ft. 9 in.	
	Depth under propellers (boat fully laden).....	1,60 m. - 5 ft. 3 in.	
	Displacement unladen.....	27,70 t. - 61068 lbs.	
	Displacement laden.....	32,30 t. - 71209 lbs.	
	Maximum number of persons on board.....	12	
	Navigation category CE 2003/44.....	A	
	Certification modules.....	B + F + Aa (sound emission) RINA S.p.A.	
Technical data	Hull type: 17° deadrise warped hull with spray rails		
	H = Overall heigth from keel to roll bar.....	4,72 m. - 15 ft. 6 in.	
	Ht = Minimum transport heigth from keel.....	4,28 m. - 14 ft. 1 in.	
	P1 = Pulpit	0,52 m. - 1 ft. 8 in.	
	P2 = Platform connected to the hull	0,00 m. - 0 ft. 0 in.	
	Fuel tanks capacity	3200 lt. - 845 US gals.	
	Water tanks capacity	660 lt. - 174 US gals.	
Performance specifications	The performance is estimated at the following conditions:.....	29,42 t. - 64851 lbs.	
	standard displacement of the yacht, at 1/2 liquid load,		
	clean hull, 25°C air temperature, good weather conditions		
	and 4 persons on board.		
	Overloading the yacht by.....	1,5 t. - 3307 lbs.	
	Top speed decreases of.....	1 knot	

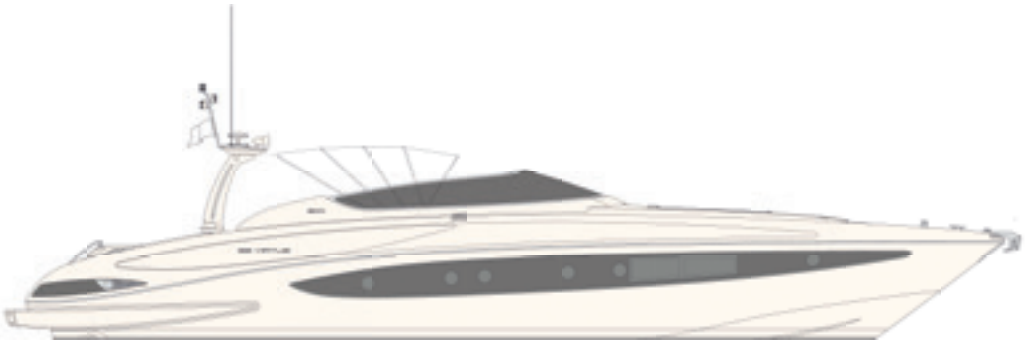

Profile

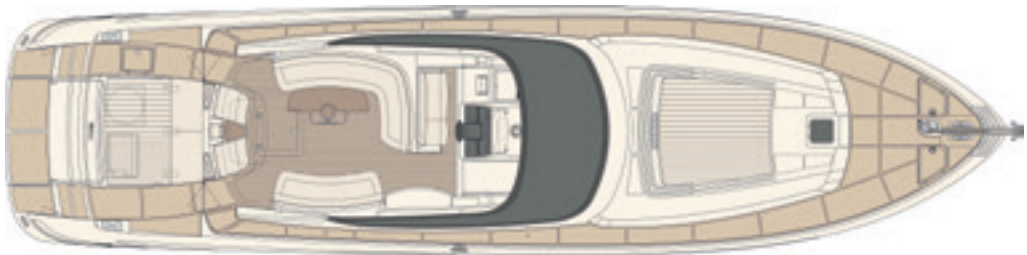

Main deck



Lower deck