

ISEO
AQUARIVA SUPER
RIVARAMA SUPER
RIVALE
SPORTRIVA 56'
63' VERTIGO
63' VIRTUS
68' EGO SUPER
75' VENERE SUPER
86' DOMINO
88' FLORIDA
92' DUCHESSA
122' MYTHOS












Motorizzazione	1 YANMAR 6BY2 260 / POTENZA 260 mhp / 191 kW a 4000 giri/min + piede poppiero Yanmar ZT 370 duoprop 1 * YANMAR 8LV 320 / POTENZA 320 mhp / 235 kW a 3800 giri/min + piede poppiero Yanmar ZT 370 duoprop 1 * MERCURUISER 377 DTS MAG 320 V8 / POTENZA 320 mhp / 235 kW a 4800 giri/min + piede poppiero Bravo III		
	Yanmar	Yanmar	Mercruiser
	260	320	320
Velocità	Velocità massima	36	40
	in nodi	30	35
	Velocità di crociera	34	34
		Yanmar	Yanmar
		260	320
Autonomia	Velocità massima	205	200
in miglia nautiche - dato indicativo	Velocità di crociera	250	210
		170	
Dimensioni principali	Loa = Lunghezza fuori tutto ISO 8666	8,24 m. - 27 ft. 0 in.	
	Lh = Lunghezza di costruzione ISO 8666	8,21 m. - 26 ft. 11 in.	
	Lg = Lunghezza al galleggiamento (a pieno carico)	7,08 m. - 23 ft. 3 in.	
	Larghezza massima	2,50 m. - 8 ft. 2 in.	
	Immersione sotto le eliche (a pieno carico)	0,96 m. - 3 ft. 2 in.	
	Dislocamento ad imbarcazione scarica e asciutta	2,86 t. - 6305 lbs.	
	Dislocamento a pieno carico	3,75 t. - 8272 lbs.	
	Numero massimo di persone imbarcabili	6	
	Categoria di navigazione CE 2003/44	B	
	Certificazione moduli	B + C RINA S.p.A.	
Dati caratteristici	Tipo di carena: Monohedron a convessità variabile con deadrise 15° e pattini di sostentamento		
	H massima = Altezza massima dalla chiglia al parabrezza	1,96 m. - 6 ft. 5 in.	
	H trasporto = Altezza minima per il trasporto dalla chiglia	1,96 m. - 6 ft. 5 in.	
	P1 = Sporgenza prodiera del pulpito	0,03 m. - 0 ft. 1 in.	
	Capacità serbatoio carburante	330 lt. - 87 US gals.	
	Capacità serbatoi acqua	84 lt. - 22 US gals.	
Specifiche prestazionali	I dati prestazionali sono stabiliti al seguente dislocamento:	3,18 t. - 7012 lbs.	
	e si riferiscono alla barca standard, a 1/3 carico liquidi, con carena pulita, temp. 25°C, buone condizioni climatiche e 2 persone a bordo.		
	Sovraccaricando la barca di	0,25 t. - 551 lbs.	
	Si ha una perdita di velocità massima pari a	1 nodo	


Motorization	1 * YANMAR 6BY2 260 / POWER 260 mhp / 191 kW at 4000 rpm + stern drive Yanmar ZT 370 duoprop 1 * YANMAR 8LV 320 / POWER 320 mhp / 235 kW at 3800 rpm + stern drive Yanmar ZT 370 duoprop 1 * MERCURUISER 377 DTS MAG 320 V8 / POWER 320 mhp / 235 kW at 4800 rpm + stern drive Bravo III			
		Yanmar	Yanmar	Mercruiser
		260	320	320
Speed	Maximum speed	36	40	39
in knots	Cruising speed	30	35	34
		Yanmar	Yanmar	Mercruiser
		260	320	320
Range	Maximum speed	205	200	140
in nautical miles - prediction data	Cruising speed	250	210	170
Main sizes	Loa = Overall length (standard ISO 8666)	8,24 m. - 27 ft. 0 in.		
	Lh = Hull length (standard ISO 8666)	8,21 m. - 26 ft. 11 in.		
	Lwl = Waterline length (boat fully laden)	7,08 m. - 23 ft. 3 in.		
	Maximum beam	2,50 m. - 8 ft. 2 in.		
	Depth under propellers (boat fully laden)	0,96 m. - 3 ft. 2 in.		
	Displacement unladen	2,86 t. - 6305 lbs.		
	Displacement laden	3,75 t. - 8272 lbs.		
	Maximum number of persons on board	6		
	Navigation category CE 2003/44	B		
	Certification modules	B + C RINA S.p.A.		
Technical data	Hull type: 15° deadrise Monohedron hull with spray rails			
	H = Overall heigth from keel to windscreen	1,96 m. - 6 ft. 5 in.		
	Ht = Minimum transport heigth from keel	1,96 m. - 6 ft. 5 in.		
	P1 = Pulpit	0,03 m. - 0 ft. 1 in.		
	Fuel tank capacity	330 lt. - 87 US gals.		
	Water tanks capacity	84 lt. - 22 US gals.		
Performance specifications	The performance is estimated at the following conditions: standard version displacement of the yacht, at 1/3 liquid load, clean hull, 25°C air temperature, good weather conditions, 2 persons on board.	3,18 t. - 7012 lbs.		
	Overloading the yacht by	0,25 t. - 551 lbs.		
	Top speed decreases of	1 knot		



Profile

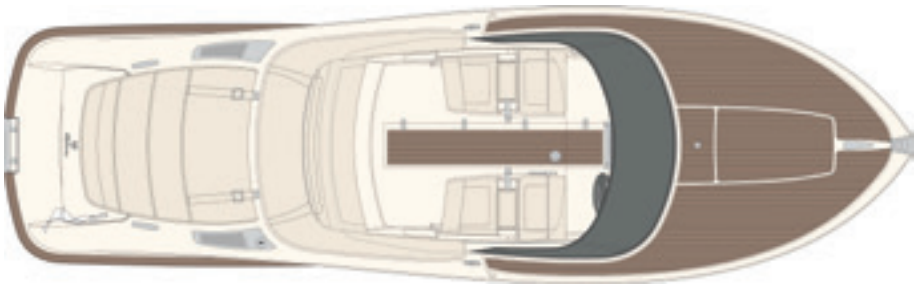

Main deck

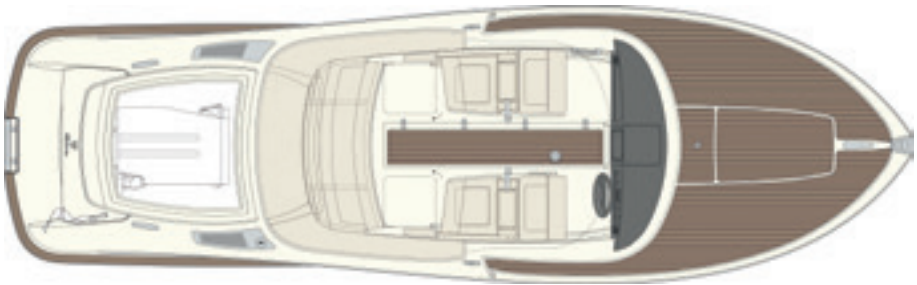

Lower deck