

A close-up photograph of a yacht's hull. The upper part of the image shows a dark, possibly black, upper hull section with a stainless steel railing. Below this is a large, light-colored (likely white or light grey) section of the hull. On this light section, the text '90 ARGO' is printed in a large, bold, sans-serif font. Below it, the brand name 'Riva' is written in a smaller, elegant script font. The lower part of the image shows a dark, curved structure, likely part of the yacht's deck or a lower hull section, with a sharp, angular design.

90 ARGO

Riva





Riva

90' ARGO

A FERRETTI GROUP BRAND



A photograph of ancient Greek ruins, including a prominent column and stone walls, situated on a rocky shore. The scene is captured during a dramatic sunset, with the sun low on the horizon, casting a golden glow over the water and sky. The sky is filled with large, textured clouds. In the distance, a hilly coastline is visible across the sea. The foreground shows scattered stone blocks and a small, dark shrub.

A JOURNEY WITH MY ARGO
"GREECE"

























Riva 90 ARGO





Riva

80 ARGO





























Riva 50 AF60
































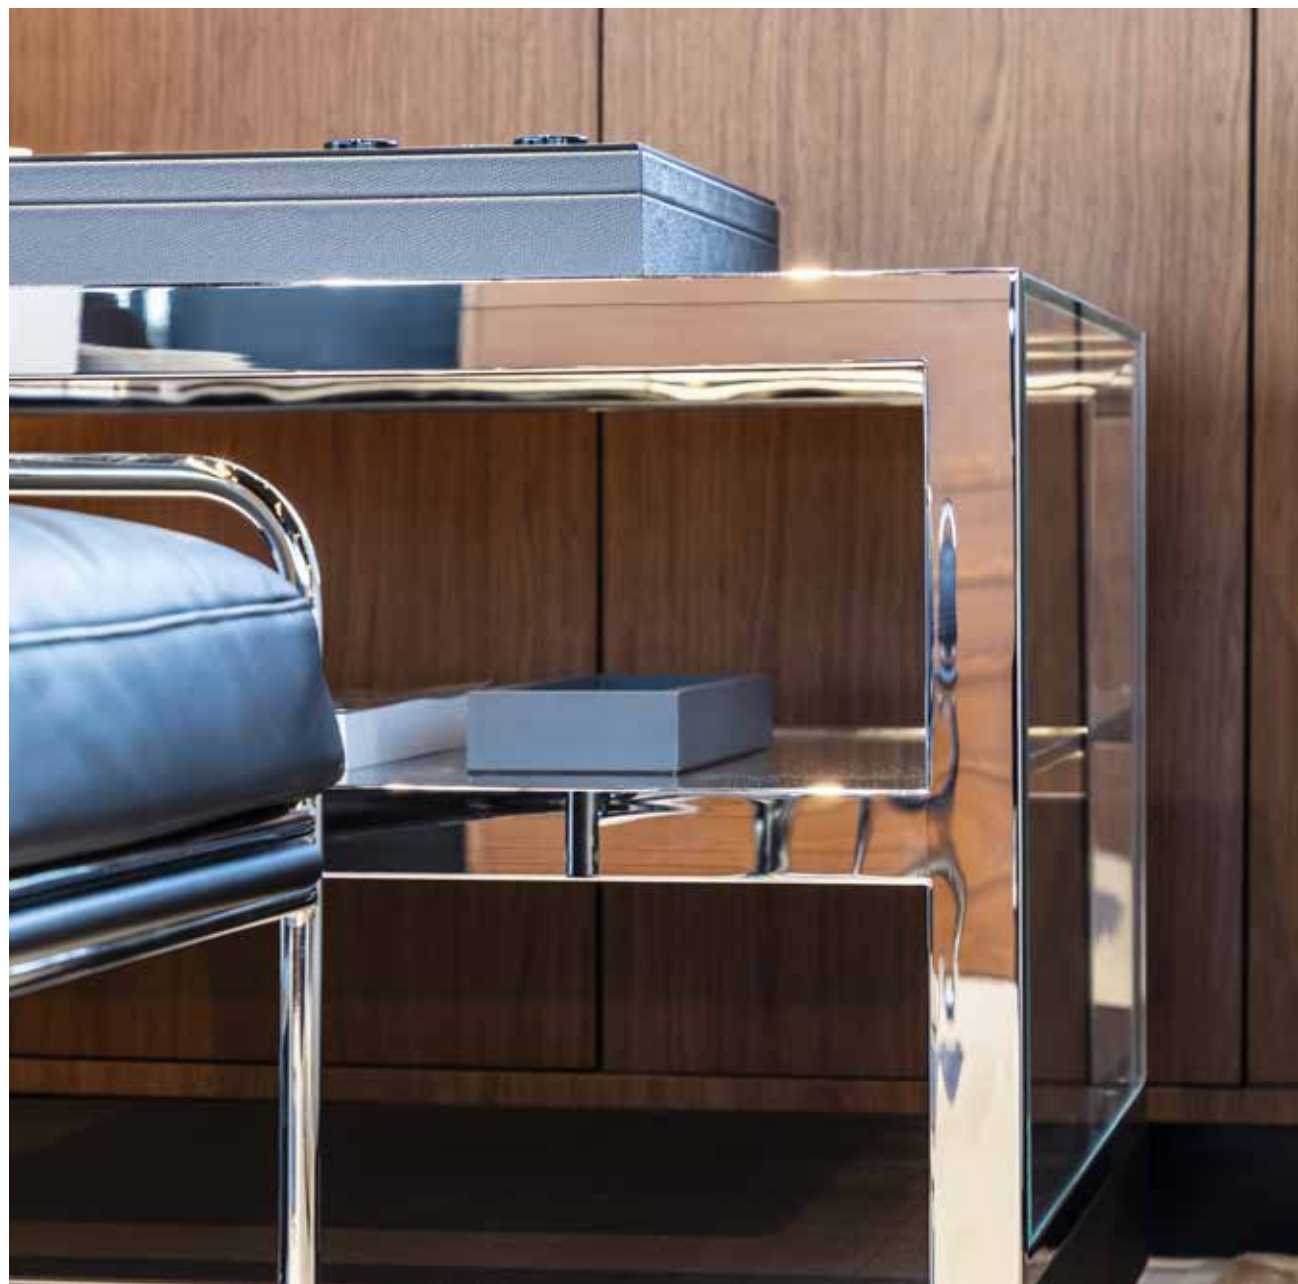



















































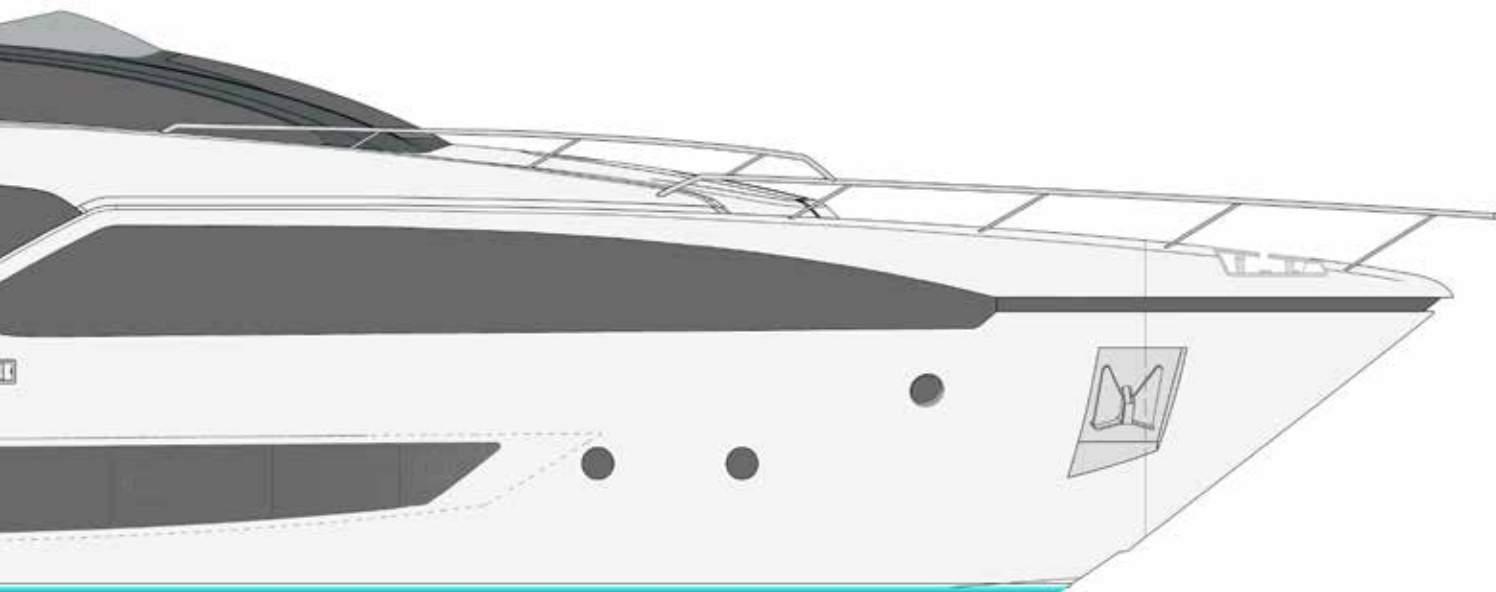


Profile

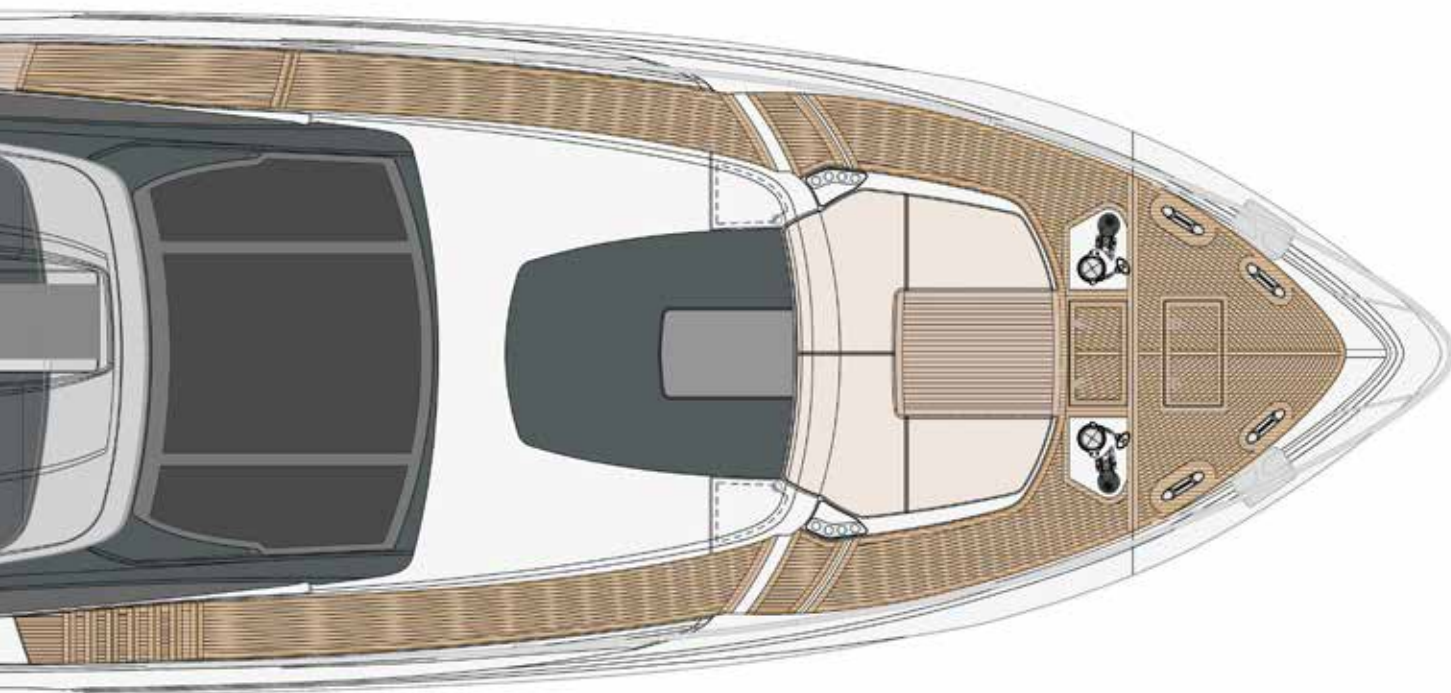


Flybridge

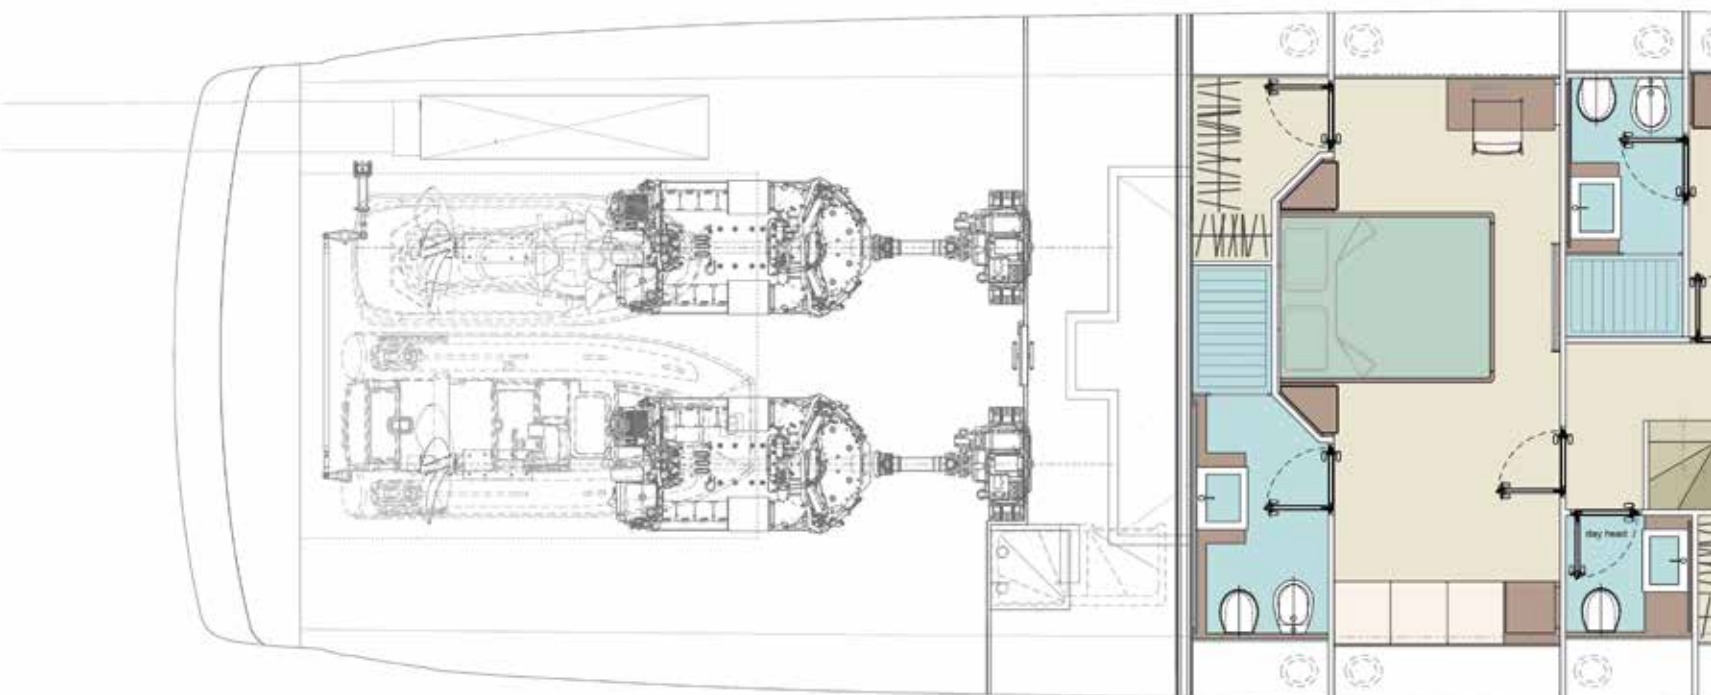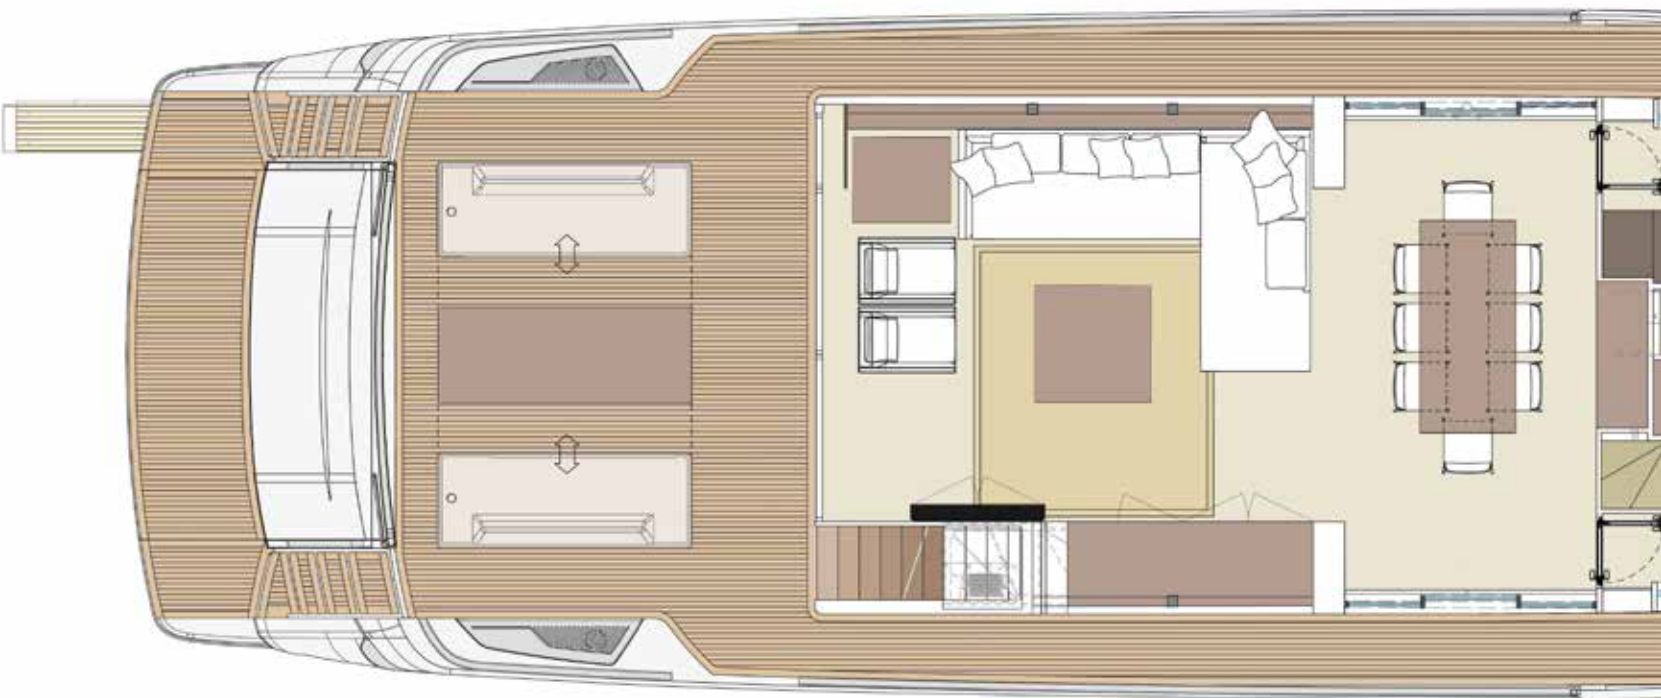

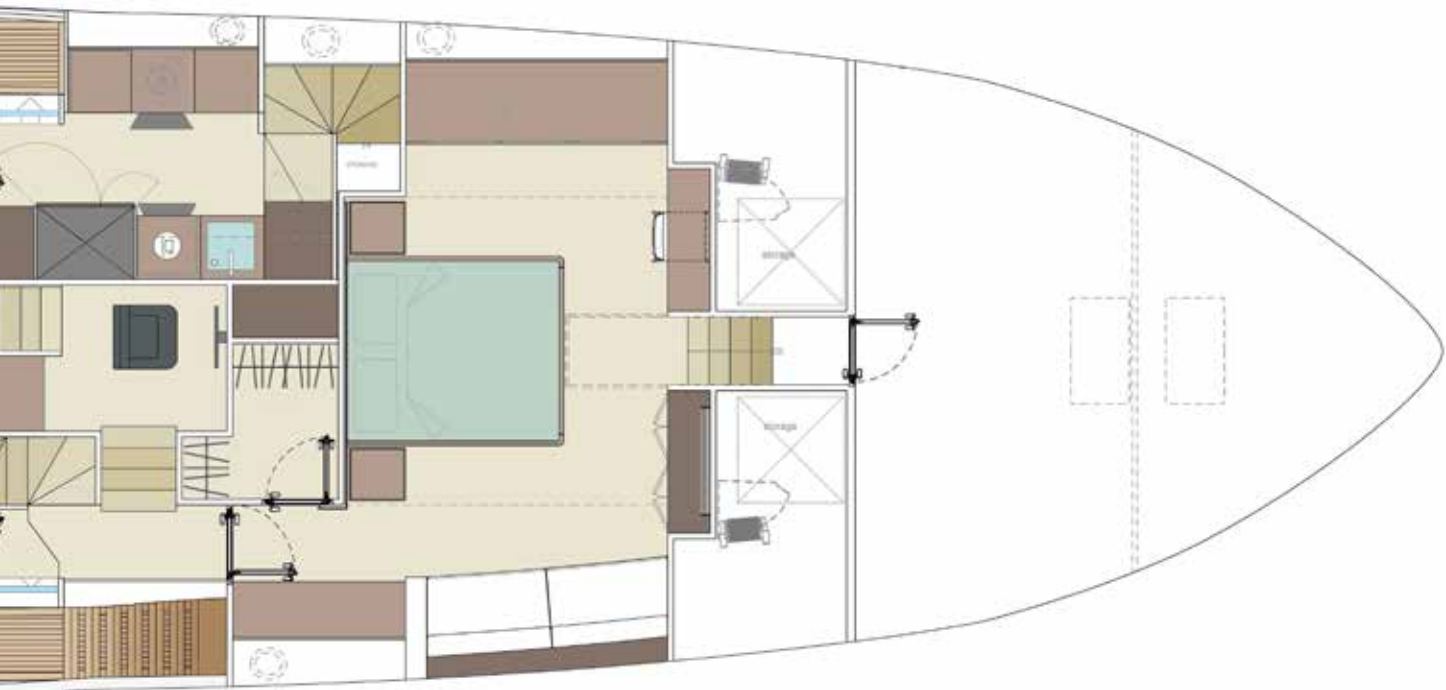

Main deck

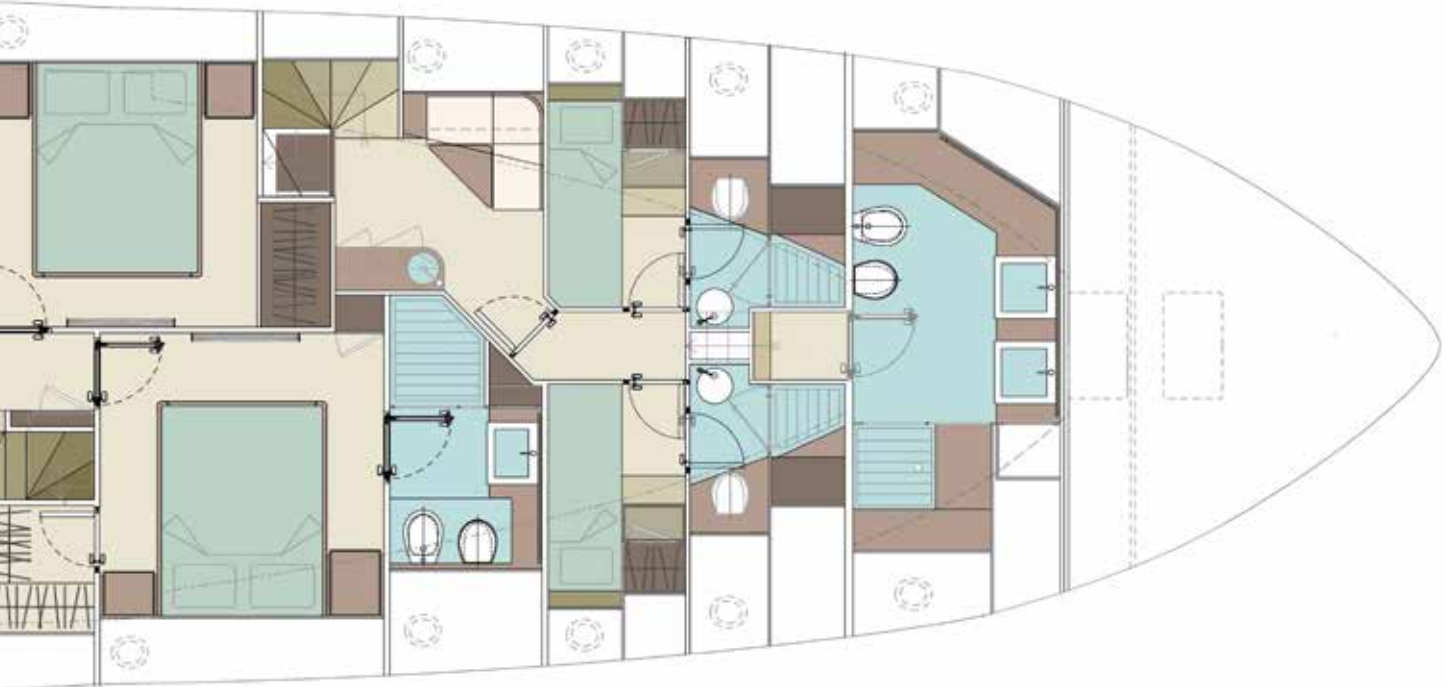

Lower deck



TABELLE TECNICHE | TECHNICAL SHEET

PRELIMINARY

Motorization	2 x MTU 12V 2000 M96L power 1948 mhp / 1432 kW at 2450 rpm (std)			
	2 x MTU 16V 2000 M84 power 2218 mhp / 1630 kW at 2450 rpm (opt)			
	2 x MTU 16V 2000 M96 power 2435 mhp / 1790 kW at 2450 rpm (opt)			
		MTU 1948	MTU 2218	MTU 2435
Speed	Maximum speed	26 knots	28 knots	30 knots
	Cruising speed.....	22 knots	24 knots	26 knots
Range	Maximum speed	300 n.m.	275 n.m.	275 n.m.
prediction data	Cruising speed.....	320 n.m.	300 n.m.	300 n.m.
Main sizes	Loa = Overall length (standard ISO 8666)	28,49 m. - 93 ft. 6 in.		
	Lh = Hull length (standard ISO 8666).....	23,98m. - 78 ft. 8 in.		
	Lwl = Waterline length (boat fully laden)	23,10 m. - 75 ft. 9 in.		
	Maximum beam.....	6,50 m. - 21 ft. 4 in.		
	Depth under propellers (boat fully laden).....	2,15 m. - 7 ft. 1 in.		
	Displacement unladen	85 t. - 187393 lbs.		
	Displacement unladen	98 t. - 216053 lbs.		
	Maximum number of persons on board.....	20		
	Design category Directive 2013/53/EU	A.		
	Certification modules.....	B + F + Aa (sound emission) RINA S.p.A.		
Technical data	Hull type: warped hull with spray rails and aft deadrise 12°			
	H = Overall height from keel to rollbar	8,60m. - 28 ft. 3 in.		
	Ht = Minimum transport height from keel	6,82m. - 22 ft. 5 in.		
	P = pulpit + transom.....	4,51m. - 14 ft. 10 in.		
	Fuel tanks capacity	8700 lt. - 2298 US gals.		
	Water tanks capacity	1320 lt. - 349 US gals.		
Performance	The performance is estimated at the following		88,48 t. - 195056 lbs.	
specifications	conditions: standard version displacement of the yacht: at 1/3 liquid load, clean hull, 25°C air temperature good weather conditions, 6 persons on board			
	Overloading the yacht by:	1,2 t. - 2646 lbs.		
	top speed decreases of	1 knot.		

Motorizzazione	2 x MTU 12V 2000 M96L potenza 1948 mhp / 1432 Kw a 2450 g/min (std)			
	2 x MTU 16V 2000 M84 potenza 2218 mhp / 1630 kW a 2450 giri/min (opt)			
	2 x MTU 16V 2000 M96 potenza 2435 mhp / 1790 kW a 2450 giri/min (opt)			
		MTU 1948	MTU 2218	MTU 2435
Velocità	Velocità massima	26 nodi	28 nodi	30 nodi
	Velocità di crociera	22 nodi	24 nodi	26 nodi
Autonomia	Velocità massima	300 m.n	275 m.n	275 m.n
dato indicativo	Velocità di crociera	320 m.n	300 m.n	300 m.n
Dimensioni	Loa = Lunghezza fuori tutto ISO 8666.....	28,49 m. - 93 ft. 6 in.		
principali	Lh = Lunghezza di costruzione ISO 8666.....	23,98m. - 78 ft. 8 in.		
	Lg = Lunghezza al galleggiamento (a pieno carico)	23,10 m. - 75 ft. 9 in.		
	Larghezza massima (compresi bottazzi)	6,50 m. - 21 ft. 4 in.		
	Immersione sotto le eliche (a pieno carico).....	2,15 m. - 7 ft. 1 in.		
	Dislocamento ad imbarcazione scarica e asciutta	85 t. - 187393 lbs.		
	Dislocamento a pieno carico	98 t. - 216053 lbs.		
	Numero massimo di persone imbarcabili.....	20		
	Categoria di progettazione Direttiva 2013/53/EU.....	A.		
	Certificazione moduliB + F + Aa (sound emission) RINA S.p.A.			
Dati caratteristici	Tipo di carena: Geometria variabile con pattini di sostentamento e deadrise 12°			
	H massima = Altezza massima dalla chiglia	8,60m. - 28 ft. 3 in.		
	H trasporto = Altezza minima per il trasporto dalla chiglia.....	6,82m. - 22 ft. 5 in.		
	P = Sporgenza poppiera e prodiera del pulpito	4,51m. - 14 ft. 10 in.		
	Capacità serbatoi carburante.....	8700 lt. - 2298 US gals.		
	Capacità serbatoi acqua.....	1320 lt. - 349 US gals.		
Specifiche	I dati prestazionali sono stabiliti al seguente		88,48 t. - 195056 lbs.	
prestazionali	dislocamento e si riferiscono alla barca standard,			
	a 1/3 carico liquidi, con carena pulita, temp. 25°C,			
	buone condizioni climatiche e 6 persone a bordo			
	Sovraccaricando la barca di.....		1,2 t. - 2646 lbs.	
	si ha una perdita di velocità massima pari a.....		1 nodo.	





